

Hot-dip galvanized strip




BURSERYDS BRUK

Hot-dip galvanized strip




SIZE RANGE

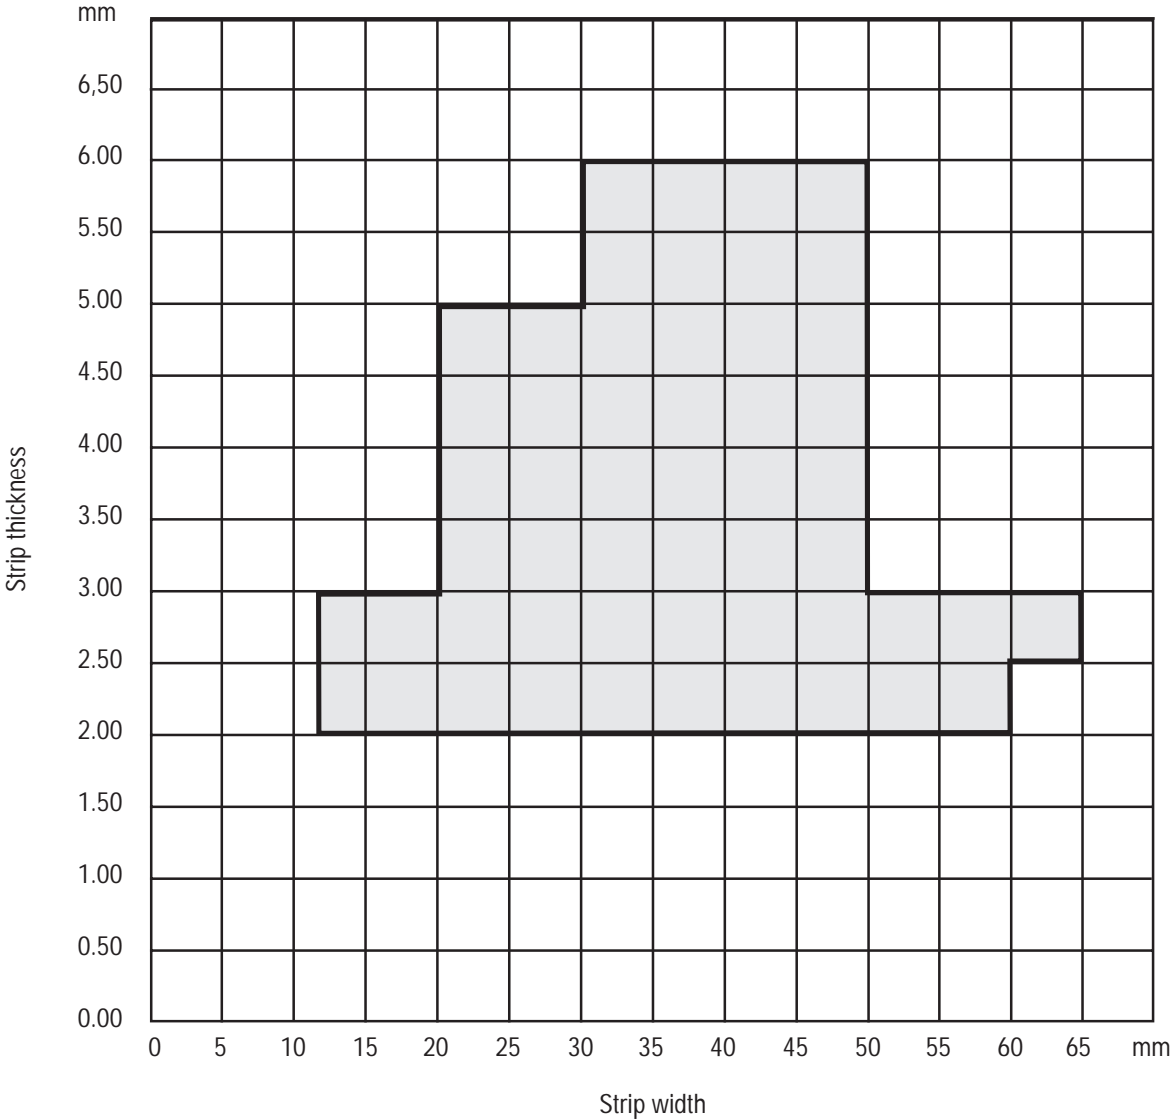

Hot-dip galvanized strip



QUALITY	EN 10142												
EDGES	Deburred edges Slitted edges Galvanized edges												
DELIVERY FORM	Coils Straightend and cut to lengths - max. 6000 mm Oscillated coils												
COIL SIZES	Inside diameter 400 mm, also 500 mm by special agreement Outside diameter max. 1300 mm												
ZINC COATING	Zinc weight 150–350 g/m ²												
CONVERSION TABLE ZINC WEIGHT	<table border="1"><thead><tr><th>g/m²</th><th>μm</th></tr></thead><tbody><tr><td>150</td><td>21</td></tr><tr><td>200</td><td>28</td></tr><tr><td>250</td><td>35</td></tr><tr><td>300</td><td>42</td></tr><tr><td>350</td><td>49</td></tr></tbody></table>	g/m ²	μm	150	21	200	28	250	35	300	42	350	49
g/m ²	μm												
150	21												
200	28												
250	35												
300	42												
350	49												
TYPICAL APPLICATIONS	Hot-dip galvanized strip offers excellent corrosion resistance and is used for applications such as: <ul style="list-style-type: none">– Gutter hooks– Shelf brackets– Cable fasteners– Ventilation systems– Construction fittings– Hose clamps– Sheet metal works– Fasteners												
PACKING	Coils are supplied on EUR pallets or according to agreement Straight lengths are supplied in bundles Plastic wrapping, if required												

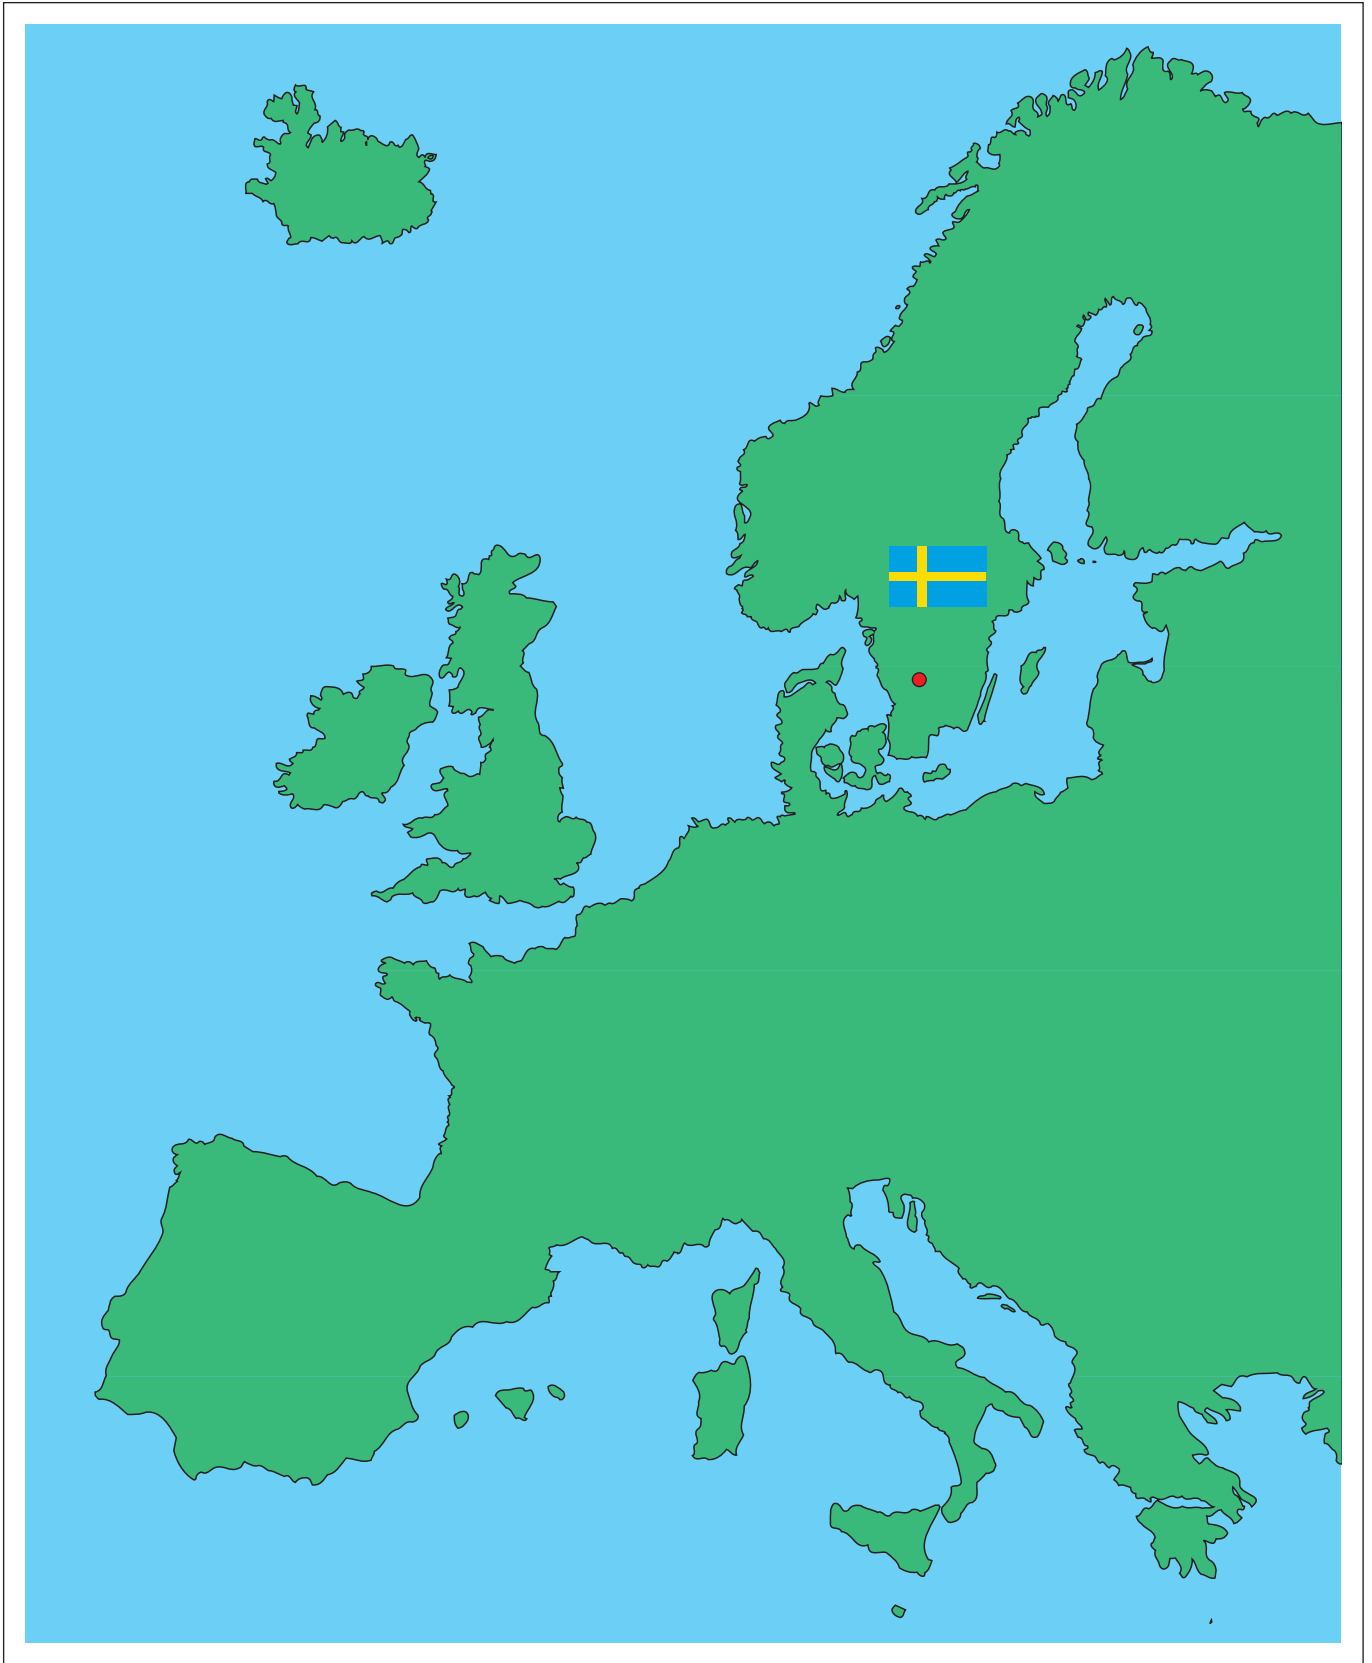

BURSERYDS BRUK

SE-330 26 Burseryd, Sweden · Tel. +46 (0)371-375 00 · Fax +46 (0)371-375 19
info@burserydsbruk.se · www.burserydsbruk.se