Hot-rolled strip






Hot-rolled strip



SIZE RANGE

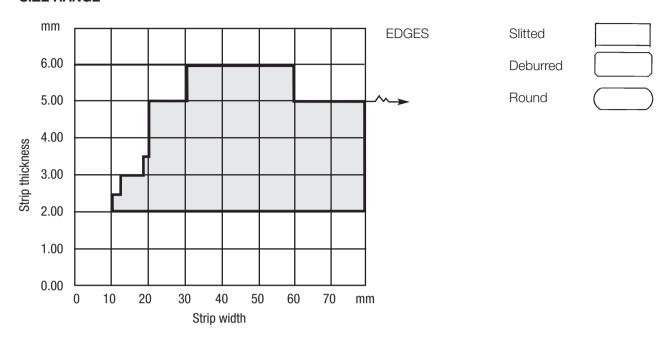

GRADE EN 10111/10025

SURFACE Hot-rolled pickled, hot-rolled slightly cold rolled

DELIVERY FORM Coil

Oscillated coils*

Straightend and cut to lengths - max 6000 mm

COIL SIZES ID 400/500 mm

OD max. 1300 mm

MECHANICAL PROPERTIES 340-470 N/mm²

A80 min. 22%

TOLERANCES Width \pm 0.3 mm**

Thickness ± 0.2 mm

PACKING Coils are supplied slightly oiled and wrapped in plastic on EUR pallets

Straight lengths are supplied slightly oiled in bundles



^{*} see special product sheet

^{**} closer tolerances available according to agreement